

# HPS POWERPLUS™

Mini Power Centers





# HPS PowerPlus™ Mini Power Centers


HPS PowerPlus™ is a convenient pre-wired power center that saves you time, money, and space. HPS PowerPlus™ combines a pre-wired primary and secondary breaker, secondary power panel, and dry-type shielded transformer in a Type 3R enclosure. Simply add the required branch circuit breakers and you effortlessly have a power center that is ready for indoor or outdoor use!

## Features

- › Type 3R indoor/outdoor enclosure
- › (optional 316 Stainless Steel enclosure available)
- › 480 Primary, 120/240 Secondary
- › Shielded transformer
- › 180° insulation class
- › 115° temperature rise
- › Primary taps: 2 - 5% FCBN
- › Meet NEMA, ANSI, & OSHA standards
- › 15 year limited warranty on transformer
- › 1 year limited warranty on Mini Power Center

## Applications

- › Industrial locations
- › Temporary power at construction sites
- › Commercial buildings
- › Test equipment
- › Plant assembly lines

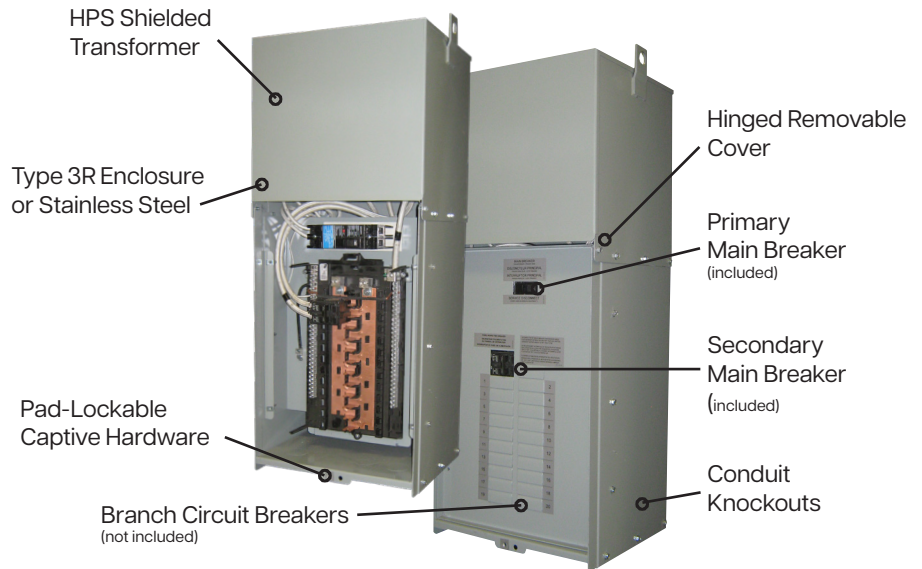

**Transformer:** HPS shielded transformers are encapsulated for general purpose indoor or outdoor use within a variety of environments. An electrostatic shield is placed between the primary and secondary winding and grounded to reduce electrical interference and to provide additional protection.

**Panel Assembly:** The HPS PowerPlus™ assembly comes fully equipped with a primary & secondary main circuit breaker. It will hold up to 20 1-pole or 10 2-pole, one inch, common trip, duplex secondary branch circuit breakers (snap-in) and ground fault circuit breakers. Once you have established your branch circuit requirements, contact your local distributor to obtain your branch circuit breakers.

**Connections:** HPS PowerPlus™ accepts Aluminum or Copper conductor.

**Protection:** The transformer is protected by the primary main breaker, which handles high interrupting fault conditions. The N.E.C. requires a secondary breaker to be between the transformer and the panel.

**Approvals:**  
HPS PowerPlus™:  US LISTED

## Single Phase Aluminum Specifications

 US LISTED

480 PRIMARY VOLTS      120/240 SECONDARY VOLTS      60 HZ

kVA Rating	Catalog Number	Max. Secondary Circuits*		Overall Dimensions - Inches [mm]			Weight Lbs. [kg]
		120 V (1 Pole)	240 V (2 Pole)	Width	Depth	Height	
Type 3R Enclosure							
5	M1PC005LESF	8	4	11.25 [285.75]	7.75 [196.85]	31.94 [811.23]	127 [57]
7.5	M1PC007LESF	8	4	13.88 [352.43]	11.13 [282.58]	31.94 [811.23]	201 [91]
10	M1PC010LESF	8	4	13.88 [352.43]	11.13 [282.58]	34.19 [868.38]	210 [95]
15	M1PC015LESF	12	6	15.13 [384.18]	12.50 [317.50]	34.19 [868.38]	291 [131]
25	M1PC025LESF	20	10	16.25 [412.75]	13.63 [346.08]	41.56 [1055.71]	423 [190]
316 Stainless Steel Enclosure							
5	M1PC005LESF7	8	4	11.25 [285.75]	7.75 [196.85]	31.94 [811.23]	127 [57]
7.5	M1PC007LESF7	8	4	13.88 [352.43]	11.13 [282.58]	31.94 [811.23]	201 [91]
10	M1PC010LESF7	8	4	13.88 [352.43]	11.13 [282.58]	34.19 [868.38]	210 [95]
15	M1PC015LESF7	12	6	15.13 [384.18]	12.50 [317.50]	34.19 [868.38]	291 [131]
25	M1PC025LESF7	20	10	16.25 [412.75]	13.63 [346.08]	41.56 [1055.71]	423 [190]

\*Please contact factory for exact number of secondary circuits available.

## Circuit Breaker Part Numbers






kVA	Primary Breaker	Secondary Breaker	Max. Rating Secondary Breaker
5	ED42B020	Q225	25
7.5	ED42B025	Q235	35
10	ED42B035	Q250	50
15	ED42B050	Q270	70
25	ED42B090	Q2110	110

Secondary: 10,000 Amps RMS Symmetrical Interrupting Capacity.

Primary: 18,000 Amps RMS Symmetrical Interrupting Capacity @ 480V. Circuit Breakers listed above are Siemens part numbers.

Breakers can be purchased from your local HPS Distributor.

## HPS PowerPlus™ is your compact economical solution!

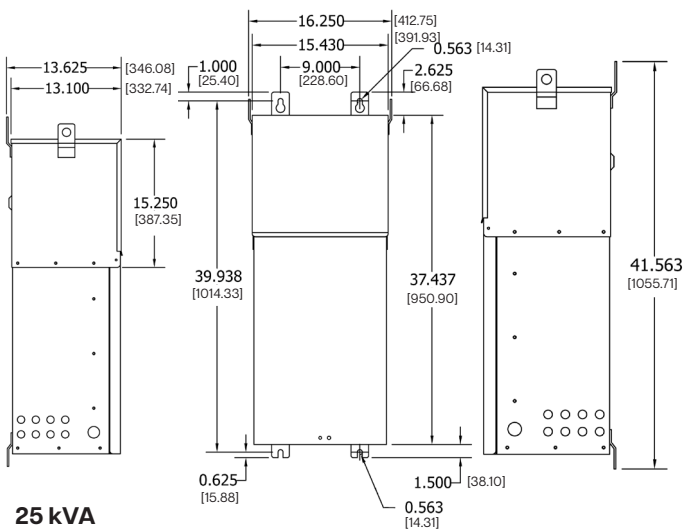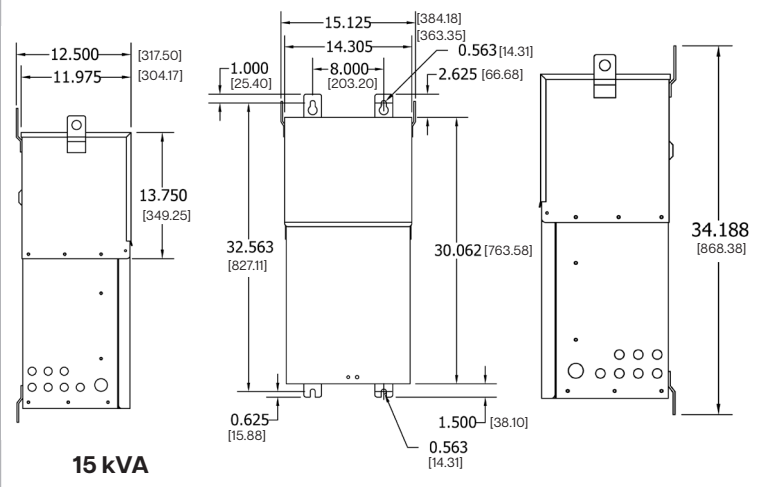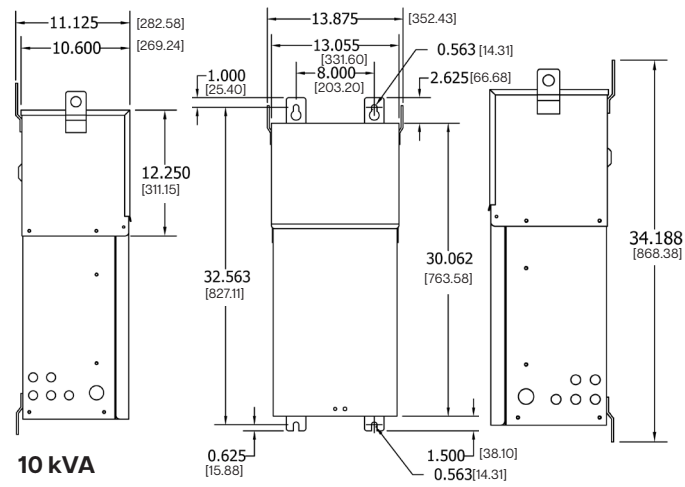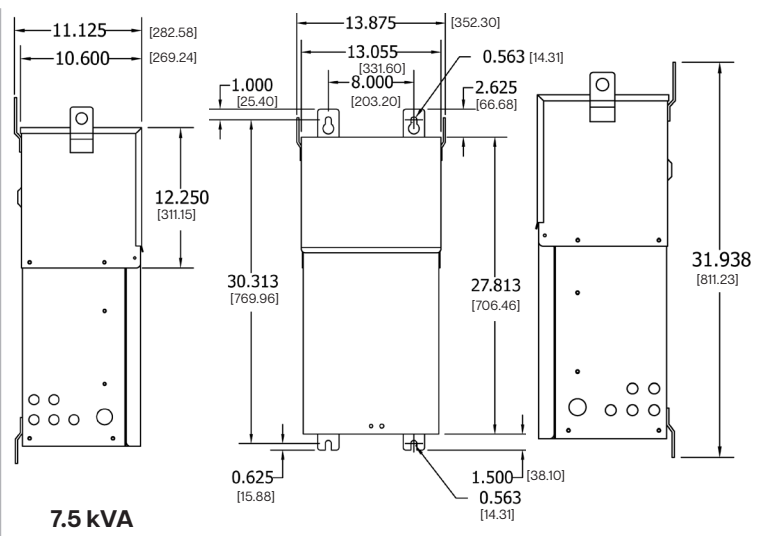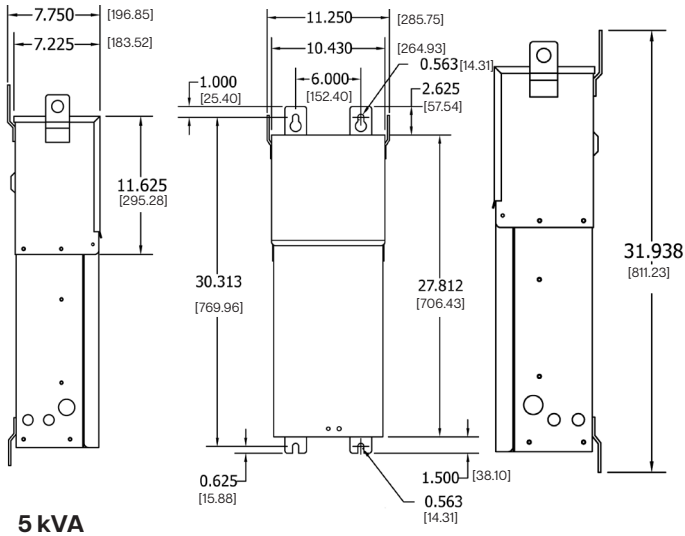

Dimensions in Inches [mm]



## CANADA

### Hammond Power Solutions

595 Southgate Drive  
Guelph, Ontario N1G 3W6  
Tel: (519) 822-2441 | Fax: (519) 822-9701  
Toll Free: 1-888-798-8882

[sales@hammondpowersolutions.com](mailto:sales@hammondpowersolutions.com)



## UNITED STATES

### Hammond Power Solutions

1100 Lake Street  
Baraboo, Wisconsin 53913-2866  
Tel: (608) 356-3921 | Fax: (608) 355-7623  
Toll Free: 1-866-705-4684

[sales@hammondpowersolutions.com](mailto:sales@hammondpowersolutions.com)



## MEXICO

### Hammond Power Solutions Latin America S.

Av. No. 800,  
Parque Industrial Guadalupe  
Guadalupe, NL, Mexico, C.P. 67190.  
Tel: (819) 690-8000

[sales@hammondpowersolutions.com](mailto:sales@hammondpowersolutions.com)



## ASIA

### Hammond Power Solutions Pvt. Ltd.

Plot No 6A, Phase -1, IDA,  
Pashamylaram, Patancheru (M)  
Sangareddy, 502 307, India  
Tel: +91-994-995-0009

[marketing-india@hammondpowersolutions.com](mailto:marketing-india@hammondpowersolutions.com)

## EMEA (SALES OFFICE)

### Hammond Power Solutions SpA

Tel: +49 (152) 08800468

[sales-emea@hammondpowersolutions.com](mailto:sales-emea@hammondpowersolutions.com)



[hammondpowersolutions.com](http://hammondpowersolutions.com)



POWESP-BBH2-EN  
June 2023